

FARMLINER®

VALUE - Since 1980

GALVANISED SLASHERS



The Farmliner brand has been a firm favourite since 1980, when Farmliner tractors were first introduced to Australia. More than 40 years later, Farmliner is synonymous with great value farm equipment that will stand the test of time.

FARMLINER SLN GALVANISED SLASHER

The Farmliner range of galvanised slashers from 4 to 6 feet cutting widths. Heavy duty construction and galvanised for durability.



Photo for illustration purposes.

Standard specifications may not match those shown

APPLICATIONS

- For small to medium sized properties with compact tractors for pasture, grass, light scrub and regrowth

SPECIFICATIONS

- **Galvanised body** for long life
- **4mm deck plate**
- **Body reinforced with box section construction** for body stiffness
- **Smooth top** reduces grass and debris build up
- Front and rear 8mm diameter **chain guards**
- Cat. 1 **Heavy duty tubular headstock**
- Rear of slasher supported by heavy-duty chain shackled to body
- Two-position headstock for **Centre and Right-hand Offset positions** with simple pin mounting. Chain is **auto centering** in headstock so slasher hangs square without needing adjustments
- 540 RPM
- **Slip clutch on gearbox**
- Heavy-duty PTO guard
- Blades mounted on double bar with round swing back stop
- **Common blade** across all slasher cutting widths
- **Service hole** on body for access to the blade nut on the cutterbar
- Conventional 12.9 Grade M20 bolt and Nyloc nut blade mounting to cutter bar
- Heavy duty skids with 50x8mm bottom skid plates
- Unique **Ezi-set adjustable skids** with **6 preset cutting heights** etched on the height plate (25, 35, 50, 60, 75 and 100mm settings)
- Skids mounted with captive M20 cuphead bolts that do not require tools under the body to adjust cutting height
- Storage tube for documents
- Optional swiveling wheel kit

FEATURES



4mm deck plate reinforced with box section ribs for superb stiffness



Double plate cutterbar with round swing back stop. Grade 12.9 M20mm standard bolt and Nyloc nut hardware




Two position headstock offset with pin. Auto-centering chain on headstock.




In right-hand offset position



Heavy duty skid plate

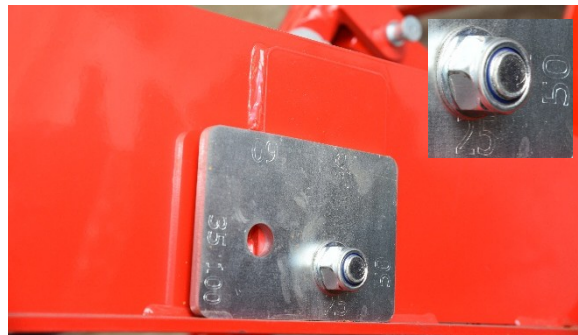

Ezi-Set height system with 6 etched height settings

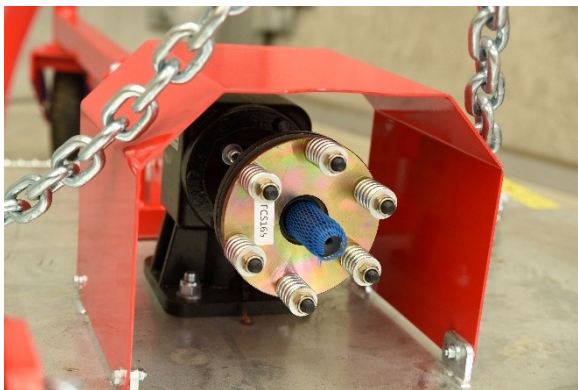

Clutch mounted to gearbox
Heavy duty PTO guard



Blade nut service access hole

OPTIONS




Wheel kit with swivelling tyre



Simple pin adjustment for wheel kit cutting height



Replacement Blade

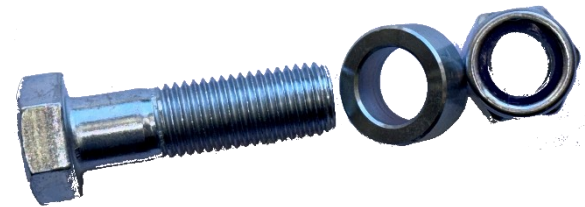

Replacement 12.9 Grade M20 bolt, bush and Nyloc nut

TECHNICAL DATA

Model	Gearbox hp	Cutting Width cm	Overall Width mm	 HP	Wheel Kits Required	 Weight kg
SLN4FT	40	120	1354	20-30	1	270
SLN4.6FT	50	138	1534	20-40	1	320
SLN5FT	50	150	1674	30-45	1	367
SLN6FT	75	180	1974	55-100	2	460

WARRANTY

12 months from the date of purchase subject to registration with Inlon Pty Ltd within 7 days of installation.